

**BHARAT COKING COAL LIMITED**  
(A Subsidiary of Coal India Ltd)  
OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

Ref. No. BCCL/XII/ACE/QTN/2011-12/37/1465

Dates: 15.09.2011

**QUOTATION NOTICE**

Sealed Quotations on percentage rate basis are invited from the bonafide & experienced contractors for the following works:

Terms and conditions:

Sl.No.	Name of the work	Estimated cost	Earnest Money	Time of completion
1.	Rep. & maint. Of 2 (Two) units 'B' type qtr No. B/24 & B/22 at R.S. Colony, Begunia.	Rs. 22,564.00	Rs.226.00	20 days
2.	Rep & maint.of one unit NHS type qtr at Bramsthan Colony. (Qtrs No. P/3)	Rs. 18,714.00	Rs. 188.00	15 days
3.	Repairing & maint. Of Durga Mandir / Kali Mandir at Begunia under C.V. Area.	Rs. 19,177.00	Rs. 192.00	10 days
4.	Repairing of collapsed courtyard wall for Qtr. No. AB-7 & BC -10 at CMWO colony. Likdih	Rs. 17,983.00	Rs. 180.00	15 days
5.	Repairing & maint. Of 1 (One) unit qtr. No. 13 at 7 No. Dhowrah, Begunia.	Rs. 10,425.00	Rs. 105.00	12 days
6.	Repairing & replacement of G.I. pipe from main road side of Lalbazar to filter plant at DOCP.	Rs. 52,082.00	Rs. 521.00	10 days.
7.	Repairing of roof highting of wall, making boundary wall & providing iron gate for electrical sub-station.	Rs. 58,942.00	Rs.590.00	22 days.
8.	Repairing & maint. Of one unit old type qtr. At babudanga chanch (Qtr. No. D/3)	Rs. 13,538.00	Rs. 136.00	10 days
9.	Repairing roof qtrs. No. CTQ-B/2 at chanch Colony.	Rs. 30,359.00	Rs. 305.00	10 days.
10	Repairing roof of block no. 'D' (old type) at babudanga at chanch colony.	Rs. 81,830.00	Rs. 820.00	20 days.
11	Repairing drain back site of CT type qtr. Attached Guest house. C.V. Area.	Rs. 31,376.00	Rs. 315.00	10 days.
12.	Re-const. of boundary wall at Durga mandir of V. West Colliery (160' lenth).	Rs. 82,516.00	Rs. 826.00	30 days.
13	Repairing & maint. Of Durga Mandir/ Kali Mandir at V. West colliery.	Rs. 11,793.00	Rs. 120.00	5 days
14	Cleaning of main drain near Football ground at R.S. Colony, Begunia.	Rs. 13,092.00	Rs. 135.00	10 days
15	Cleaning of sump and channel for raw water supply to Begunia WTP and maint. Sump & Channel up to 4 Months.	rs. 81,815.00	Rs. 820.00	4 Months
16.	Repairing & maint. Of 5 units NHS Qtr. No. O/3, M/4, N/4, M/8 & Q/4 at D.R. Colony.	Rs. 71,165.00	Rs.715.00	45 days.
17	Cleaning of drain I No. Septic tank near 'A' type & 'B' type qtr. At R.S. Colony, Begunia.	Rs. 25,061.00	Rs. 251.00	15 days
18	Repairing & maint. Of school at Palasia with allied work at Basantimata Colliery.	Rs. 39,097.00	Rs. 391.00	20 days.
19.	Outer repairing of 1 block 'C' type qtr No. 9,10,11 & 12 at R.S. Colony.	Rs. 34,788.00	Rs. 350.00	25 days.
20	Repairing of collapsible gate, tile flooring in AGM's chamber & miscellaneous at Begunia Area Office.	Rs. 32,949.00	Rs. 330.00	15 days.

- Completed sealed Quotations will be received on 27.09.2011 up to 3.00 P.M. at the following places. Quotation may opt any one place to submit their quotation as per their convenience.
  - In the office of the General Manager, C.V. Area-XII, AT-Begunia, P.O –Barakar(W.B.)
  - At BCCL H.Q. i.e. C.I.S.F. post, near Koyala Bhawan gate, Koyala Nagar, Dhanbad.
  - Office of the ACE, CCWO, W.W.Z. Area, Saraidhela, Dhanbad.
  - Office of the ACE, CHD, Jagjiban Nagar, Dhanbad.
- Quotations will be opened on 29.09.2011 at 11.30 A.M. in the office of the Area Civil Engineer, C.V. Area-XII, AT-Begunia, P.O –Barakar(W.B.).
- Specification of work shall be governed by DSR-2007 & C.P.W.D specification.
- Terms and conditions as per C.I.L. C.E. manual shall be applicable against the quotations submitted against this Quotation Notice.

Contd .....P/2

-P/2-

5. Completed sealed Quotations shall consist of (1) EMD in the shape of cash receipt obtained from the finance deptt. C.V. Area-XII or DD from any Scheduled/Nationalised Bank, (2) Experience certificate, (3) Copy of Pan card, (4) Copy of VAT/Sales Tax clearance certificate along with VAT/Sales Tax registration No.(TIN), (5) Declaration and (6) EFT (Electronic Fund Transfer) & ECS (Electronic Clearance System) as per the format issued along with the Tender paper and (7) BOQ along with quoted rate by the Tenderer.
6. The quoted rate shall include all taxes and levies.
7. Statutory deductions for Income Tax and Sales Tax shall be made as per Rules and notifications.
8. The contractor has to abide by the Rules of Contract Labour Regulation & Abolition Act-.
9. Validity of tender shall be 120 days from the date of opening of the tender.
10. Interested parties can collect the BOQ and other related papers of the Quotation from the office of the Area Civil Engineer, C.V. Area-XII, AT-Begunia, P.O –Barakar(W.B.). from 22.09.2011 to 26.09.2011 during office hours except Sunday and Holiday. BOQ and other relevant pages (Declaration & EFT form) can be down loaded from BCCL website- <http://www.bccl.gov.in>
11. No conditional tender shall be accepted.
12. The contractors have to be acquainted with the site condition
13. Unless otherwise mentioned, no material will be issued by the department
14. Successful tender has to deposit 5% Performance Security (including 1% EMD) and another 5% Security Deposit will be deducted from the Running Account/ Final Bill.
15. The management of BCCL reserves right to reject any or all tender or split the work among two or more tenderers without assigning any reasons whatsoever.

**Sd/-**  
**Area Civil Engineer**  
Chanch Victoria Area-XII

Copy to :-

- 1) GM, Chanch Victoria Area-XII.
- 2) GM (Civil), BCCL, Koyla Nagar.
- 3) All CGM/GM of Areas/Projects under BCCL.
- 4) Addl. GM, Chanch Victoria Area-XII.
- 5) A.F.M., Chanch Victoria Area-XII.
- 6) All P.O.s of Chanch Victoria Area-XII.
- 7) Cashier, C.V. Area-XII
- 8) Incharge,, CISF Post, Koyala Bhawan gate, Koyala Nagar,
- 9) Assistant Commandant, CISF, C.V. Area-XII-with 2 copies of NIT for displaying on Notice Board.
- 10) Builders Association of India, Central Akashkinaree Kanta, Katras Garh, Dhanbad-828113.
- 11) ACE CCWO, W.W.Z Area saraidhela, Dhanbad.
- 12) ACE CHD, jagiban Nagar, Dhanbad
- 13) **Notice Board.**



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Rep. & maint. Of 2 (Two) units ‘B’ type qtr No. B/24 & B/22 at R.S. Colony, Begunia”.
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/ 1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

#### BILL OF QUANTITY: (Sl. No. 1)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 13.16.1	6mm cement plaster of mix: 1:3 (1 cement: 3 fine sand ).	29.54	Sqm	62.15	1,835.91
2/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	38.89	Sqm	67.65	2,630.90
3/ 9.1.2	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position. Sal wood	0.13	Cum	30,511.90	3,966.54
4/ 12.40.2 12.40.1	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS: 13592 Type A including jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion. i) single socketed pipes. 110 mm diameter. ii) single socketed pipes. 75 mm diameter.	9.14 3.04	Meter Meter.	163.40 95.00	1,493.47 288.80
5/ 12.42.5.2	Providing and fixing on wall face unplasticised – PVC moulded fittings / accessories for unplasticised Rigid PVC rain water pipes conforming to IS: 13592 Type A including jointing with seal ring conforming to IS: 5382 leaving 10 mm gap for thermal expansion. 110mm bend.	1.00	Each	134.20	134.20
6/ 11.3 (A.R.)	Cement concrete flooring 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat sement including cement slurry, but excluding the cost of nosing of steps etc. complete. 25 mm thick with 12.5 mm nominal size stone aggregate.	5.23	Sqm	143.75	751.81
7/ 6.12.2	Half brick masonry with F.P.S.CD 50 brick of class designation in foundations and plinth in . cement mortar 1:4 (1 cement: 4 coarse sand).	0.95	Sqm	257.25	244.38
8/ 13.7.2	12 mm cement plaster finished with a floating coat of neat cement of mix: 1:4 (1 Cement: 4 fine sand).	2.21	Sqm	97.90	216.25
9/ 6.1.2 (A.R.)	Brick work in F.P.S bricks of class designation 50 in foundation and plinth in: Cement mortar 1:6 (1 cement: 6 coarse sand).	0.077	Cum	2,007.00	154.53
10/ 9.53	Providing 40x5 mm flat iron hold fast 40 cm long including fixing to frame with 10 mm diameter bolts, nuts and wooden plugs and embeddings in cement concrete block 30x10x15cm 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size).	15.00	Each	61.50	922.50
11/ 9.48.1	Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. all complete: Fixed to steel windows by welding.	33.00	Kg	59.25	1,955.25

Contd.....P/2

12/ M.R.	Cleaning of septic tank.	1.00	Each	1000.00	1000.00
13/ 14.42.1	White washing with lime to give an even shade: Old work (two or more coats).	481.22	Sqm	4.10	1,973.00
14/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	140.84	Sqm	22.85	3,218.19
15/ 0112	Adjusting door window	2.00	Each	141.60	283.20
0115	i) carpenter ii) helper	2.00	Each	135.25	270.50
16/ 15.56	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	28.00	Sqm	8.20	229.60
17/ 15.12.1	Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 meters lead: of are 3 sq. metres and below.	8.00	Each	54.60	436.80
18/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	60.00	Sqm	9.30	558.00
	<b>TOTAL</b>			<b>Rs.</b>	<b>22,563.83</b>
			<b>Say</b>	<b>Rs.</b>	<b>22,564.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_(Rupees\_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड

(कोयला इण्डिया लिमिटेड का एक अंग)



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Repairing and maint. Of One unit NHS type qtr at Bramsthan colony,  
(Qtr. No. P/3)

2. Name of Tenderer :

3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY: (Sl. No.-2)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 15.56	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	27.81	Sqm	8.20	228.04
2/ 15.2.1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 meters lead as per direction of Engineer-in-charge. 1:3:6 or richer mix.	0.35	Cum	368.45	128.96
3/ 15.12.1	Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 meters lead: of are 3 sq. metres and below.	3.00	Each	54.60	163.80
4/ A.R.	Providing and fitting 1mm M.S. sheet door /window shutter all.	120.00	Kg.	66.90	8,028.00
5/ 11.3.1 A.R.	Cement concrete flooring 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat sement including cement slurry, but excluding the cost of nosing of steps etc. complete. 25 mm thick with 12.5 mm nominal size stone aggregate.	14.64	Sqm	143.75	2,104.50
6/ 2.8.1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kind of soil.	0.53	Cum	103.40	54.80
7/ 2.27	Supplying and filling in plinth with jamuna sand under floors including, watering, ramming consolidating and dressing complete.	0.13	Cum	301.50	391.20
8/ 4.1.8	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering – All work up to plinth level:1:4:8 (1 cement: 4 coarse sand: 8 graded stone aggregate 40 mm nominal size)	0.26	Cum	2,449.00	636.74
9/ 6.1.2 (A.R.)	Brick work in F.P.S bricks of class designation 50 in foundation and plinth in: Cement mortar 1:6 (1 cement: 6 coarse sand).	0.97	Cum	2,007.00	1,946.79
10/ 6.4.2 (A.R.)	Brick work in F.P.S. bricks of class designation 50 in superstructure above plinth level up to floor V level in all shapes and sizes in : cement mortar 1:6 (1 cement : 6 coarse sand).	0.47	Cum	2,137.95	1,004.84

Contd....P/2

-P/2-

<b>11/ 13.1.2</b>	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	27.38	Sqm	67.65	14,335.26
<b>12/ 13.16.1</b>	6mm cement plaster of mix: 1:3 (1 cement: 3 fine sand ).	9.01	Sqm	62.15	559.97
<b>13/ 13.61.1</b>	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade: Two or more coats on new work.	8.18	Sqm	35.35	289.16
<b>14/ 14.54.1</b>	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	30.32	Sqm	22.85	692.81
<b>15/ 14.42.1</b>	White washing with lime to give an even shade: Old work (two or more coats).	240.00	Sqm	4.10	984.00
	<b>TOTAL</b>			<b>Rs.</b>	<b>18,713.87</b>
			Say	<b>Rs.</b>	<b>18,714.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer

-3-



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Repairing & maint. Of Durga Mandir / Kali Mandir at Begunia colliery.”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465 Date: 15.09.2011  
5. Details of E.M.D. No: Rs.: Date:

### **BILL OF QUANTITY (Sl. No. 3)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	230.59	Sqm	22.85	5,268.98
2/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	450.47	Sqm	9.30	4,189.37
3/ 14.45.1	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade: old work (one or more coats).	21.18	Sqm	14.90	315.58
4/ 14.42.1	White washing with lime to give an even shade: Old work (two or more coats).	498.42	Sqm	4.10	2,043.52
5/ 11.3.1	Cement concrete flooring 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry, but excluding the cost of nosing of steps etc. complete. 40 mm thick with 20 mm nominal size stone aggregate.	8.91	Sqm	192.95	1,719.18
6/ 15.2.1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 meters lead as per direction of Engineer-in-charge. 1:3:6 or richer mix.	0.35	Cum	368.45	128.95
7/ 12.15.1	Painting top of roofs with bitumen of approved quality at 17kg per 10sqm impregnated with a coat of coarse sand at 60 cum per 10sqm including cleaning the slab surface with brushes and finally with a piece of cloth lightly soaked in kerosene oil complete: with residual type petroleum bitumen of penetration 80/100	82.12	Sqm	63.00	5,173.56
8/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	5.00	Sqm	67.65	338.25
	<b>TOTAL</b>			<b>Rs.</b>	<b>19,177.39</b>
			<b>Say</b>	<b>Rs.</b>	<b>19,177.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड

(कोल इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER

CHANCH-VICTORIA AREA-XII

P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)

Phone : 06540-272126 ; FAX : 0341-2520063

1. Name of Work: “Repairing of collapsed courtyard wall for Qtr. No. AB-7 & BC -10 at CMWO colony. Likdih”

2. Name of Tenderer :

3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 4)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 15.7.4	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 meter lead as per direction of Engineer-in-charge. In cement mortar	1.58	Cum	310.75	490.98
2/ 6.1.2 (A.R.)	Brick work in F.P.S bricks of class designation 50 in foundation and plinth in: Cement mortar 1:6 (1 cement: 6 coarse sand).	1.15	Cum	2,007.00	2,308.05
3/ 6.4.2 (A.R.)	Brick work in F.P.S. bricks of class designation 50 in superstructure above plinth level up to floor V level in all shapes and sizes in : cement mortar 1:6 (1 cement : 6 coarse sand).	1.72	Cum	2,137.95	3,677.27
4/ 6.12.2	Half brick masonry with F.P.S.CD 50 brick of class designation in foundations and plinth in . cement mortar 1:4 (1 cement: 4 coarse sand).	8.00	Sqm	257.25	2,057.60
5/ 6.13.2	Half brick masonry with F.P.S bricks of class designation 50 in superstructure above plinth level up to floor V level Cement mortar 1:4 ( 1 cement: 4 coarse sand )	6.66	Sqm	273.45	1,821.17
6/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	57.64	Sqm	67.65	3,899.35
7/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	57.64	Sqm	9.30	536.05
8/ (A/R)	Providing and fixing 1 mm thick M.S. Sheet door with frame 40x40x6 all.	45.90	Kg.	66.90	3,070.71
9/ 13.61.1	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade: Two or more coats on new work.	3.44	Sqm	35.35	121.60
	<b>TOTAL</b>			<b>Rs</b>	<b>17,982.78</b>
			Say	<b>Rs.</b>	<b>17,983.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer





# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड  
(कोयला इण्डिया लिमिटेड का एक अंग)



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

Name of Work: “Repairing & maint. Of 1 (One) unit qtr. No. 13 at 7 No. Dhowrah, Begunia.”

2. Name of Tenderer :

3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 5)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	51.54	Sqm	67.65	3,506.97
2/ 11.3 (A.R.)	Cement concrete flooring 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat sement including cement slurry, but excluding the cost of nosing of steps etc. complete. 25 mm thick with 12.5 mm nominal size stone aggregate.	25.18	Sqm	143.75	3,619.62
3/ 15.2.1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 meters lead as per direction of Engineer-in-charge. 1:3:6 or richer mix.	0.60	Cum	368.45	221.07
4/ 15.12.1	Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 meters lead: of are 3 sq. metres and below.	1.00	Each	54.60	54.60
5/ 10.2	Structural steel work riveted, bolted or welded in built up section, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete:.	30.00	Kg	46.35	1,390.50
6/ 14.2.1	Fixing chowkhats in existing opening including embedding chowkhats in floors or walls cutting masonry for holdfasts embedding hold fasts in cement concrete blocks with cement concrete 1:3:6 (1 Cement: 3 coarse sand: 6 graded stone aggregate 20 mm nominal size). Painting two coats of approved wood preservative to sides of chowkhats and making good the damages to walls and floors as required complete including disposal of rubbish to the dumping ground within 50 meters lead: Door chowkhats.	1.00	Each	354.45	354.45
7/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	14.63	Sqm	22.85	334.29
8/ 14.42.1	White washing with lime to give an even shade: Old work (two or more coats).	82.03	Sqm	4.10	336.32
9/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	30.00	Sqm	9.30	279.00

Contd...P/2

-P/2-

10/ 15.56	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	40.00	Sqm	8.20	328.00
	<b>Total</b>			<b>Rs.</b>	<b>10,424.82</b>
			<b>Say</b>	<b>Rs.</b>	<b>10,425.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer

-3-



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड  
(कोयला इण्डिया लिमिटेड का एक अंग)



OFFICE OF THE GENERAL MANAGER

CHANCH-VICTORIA AREA-XII

P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)

Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: **“Repairing & replacement of G.I. pipe from main road side & Lalbazar To Filter plant at DOCP.”**

2. Name of Tenderer :

3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 6)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 15.44.2	Dismantling G.I. pipes (external work) including excavation and refilling trenches after taking out the pipes manually / by mechanical means including stacking of pipes within 50 metres lead as per direction of Engineer-in-charge. Above 40 mm nominal bore.	121.95	Meter	29.05	3,542.64
2/ 15.44.1	Dismantling G.I. pipes (external work) including excavation and refilling trenches after taking out the pipes manually / by mechanical means including stacking of pipes within 50 metres lead as per direction of Engineer-in-charge. 15 mm to 40 mm nominal bore.	30.48	Meter	24.90	758.95
3/ 18.12.8	Providing and fixing G.I. pipes complete with G.I. fittings including trenching and refilling etc. 80 mm dia nominal bore.	18.29	Meter.	458.15	8,379.56
4/ 18.12.6	Providing and fixing G.I. pipes complete with G.I. fittings including trenching and refilling etc. 50 mm dia nominal bore.	115.85	Meter.	280.10	32,449.58
5/ 18.13.1	Making connection of G.I. distribution branch with G.I. main of following sized by providing and fixing tee, including cutting and threading the pipe etc. complete: 25 to 40 mm nominal bore.	25.00	Each	166.05	4,151.25
6/ 18.13.2	Making connection of G.I. distribution branch with G.I. main of following sized by providing and fixing tee, including cutting and threading the pipe etc. complete: 50 to 80 mm nominal bore.	1.00	Each	423.20	423.20
7/ 18.47.8	Providing and fixing G.I. Union in existing G.I. pipe line, cutting and threading the pipe and making long screws including excavation, refilling the earth or cutting of wall and making good the same complete wherever required: 80 mm nominal bore.	1.00	Each	607.30	607.30
8/ 18.47.8	Providing and fixing G.I. Union in existing G.I. pipe line, cutting and threading the pipe and making long screws including excavation, refilling the earth or cutting of wall and making good the same complete wherever required: 50 mm nominal bore.	1.00	Each	335.50	335.50
9/ 18.12.3	Providing and fixing G.I. pipes complete with G.I. fittings including trenching and refilling etc. 25 mm dia nominal bore.	9.14	Meter.	156.85	1,433.60
	<b>TOTAL</b>			<b>Rs.</b>	<b>52,081.58</b>
			<b>Say</b>	<b>Rs.</b>	<b>52,082.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work:” **Repairing of roof high ting of wall, making boundary wall & providing iron gate for electrical sub-station.”**
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

### **BILL OF QUANTITY (Sl. No. 7)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 2.6.1-2.3	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth. 1.5m in width as well as 10sqm on plan) including disposal of excavated earth, lead up to 50m and lift up to 1.5m, disposed earth to be leveled and neatly dressed. All kinds of soil.	6.00	Cum	88.00	528.00
2/ 4.1.8	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering – All work up to plinth level:1:4:8 (1 cement: 4 coarse sand: 8 graded stone aggregate 40 mm nominal size)	1.40	Cum	2,449.00	3,428.60
3/ 6.1.2 (A.R.)	Brick work in F.P.S bricks of class designation 50 in foundation and plinth in: Cement mortar 1:6 (1 cement: 6 coarse sand).	4.54	Cum	2,007.00	9,111.78
4/ 6.12.2 (A.R.)	Half brick masonry with F.P.S.CD 50 brick of class designation in foundations and plinth in . cement mortar 1:4 (1 cement: 4 coarse sand).	19.51	Sqm	243.43	4,749.32
5/ 15.56	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	29.13	Sqm	8.20	238.86
6/ 6.4.2 (A.R.)	Brick work in F.P.S. bricks of class designation 50 in superstructure above plinth level up to floor V level in all shapes and sizes in : cement mortar 1:6 (1 cement : 6 coarse sand).	7.01	Cum	2,137.95	14,987.03
7/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	101.25	Sqm	67.65	6,849.56
8/ 12.15.1	Painting top of roofs with bitumen of approved quality at 17kg per 10sqm impregnated with a coat of coarse sand at 60 cudm per 10sqm including cleaning the slab surface with brushes and finally with a piece of cloth lightly soaked in kerosene oil complete: with residual type petroleum bitumen of penetration 80/100	102.41	Sqm	63.00	6,451.83

Contd....P/2

-P/2-

9/ 10.5.1	Providing and fixing 1mm thick m.S. sheet door with frame of 40x40x6mm angle iron and 3mm M.S. gusset plates at the junctions and corners, all necessary fittings complete, including applying a priming coat of approved steel primer. Using M.S. angels 40x40x6mm for diagonal braces.	7.43	Sqm	1,695.40	12,596.82
	<b>TOTAL</b>			<b>Rs</b>	<b>58,941.80</b>
			Say	<b>Rs.</b>	<b>58,942.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer

-3-



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड

(कोल इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII

P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)

Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Repairing & maint. Of one unit old type qtr. At babudanga chanch (Qtr. No. D/3)”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 8)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 15.2.1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 meters lead as per direction of Engineer-in-charge. 1:3:6 or richer mix.	0.53	Cum	368.45	195.27
2/ 11.3 (A.R.)	Cement concrete flooring 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat sement including cement slurry, but excluding the cost of nosing of steps etc. complete. 25 mm thick with 12.5 mm nominal size stone aggregate.	21.93	Sqm	143.75	3,152.43
3/ (A/R)	Providing and fixing 1 mm thick M.S. Sheet door with frame 40x40x6 all.	49.50	Kg.	66.90	3,311.55
4/ 9.1.3	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position. Kiln seasoned and chemically treated Hollock wood.	0.03	Cum	31,339.40	940.00
5/ 17.13.1	Providing and fixing white vitreous china wat4er closet squatting pan (Indian type) Long pattern W.C. pan of size 580mm	2.00	Each	534.60	1,069.20
6/ 17.17.1	Providing and fixing a pair of white vitreous china foot rests of standard pattern for squatting pan water closet: 250x130x30mm	2.00	Pair	111.70	223.40
7/ 14.42.1	White washing with lime to give an even shade: Old work (two or more coats).	309.00	Sqm	4.10	1,266.90
8/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	36.80	Sqm	22.85	840.88
9/ 15.56	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	33.46	Sqm	8.20	274.37
10/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	33.46	Sqm	67.65	2,263.56
	TOTAL			Rs.	13,538.00

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड

(कोल इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER

CHANCH-VICTORIA AREA-XII

P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)

Phone : 06540-272126 ; FAX : 0341-2520063

1. Name of Work: “Repairing roof qtrs. no. CTQ-B/2 at chanch Colony.”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 9)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ BCCL SOR “85”	Removal of old tarfelting.	179.32	Sqm	1.86	333.51
2/ 22.14.1	Grading roof for water proofing treatment with cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20 mm nominal size).	4.50	cum	3,314.95	14,917.27
3/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	56.34	Sqm	67.65	3,811.40
4/ 12.15.1	Painting top of roofs with bitumen of approved quality at 17kg per 10sqm impregnated with a coat of coarse sand at 60 cum per 10sqm including cleaning the slab surface with brushes and finally with a piece of cloth lightly soaked in kerosene oil complete: with residual type petroleum bitumen of penetration 80/100	179.31	Sqm	63.00	11,296.53
	<b>TOTAL</b>			<b>Rs.</b>	<b>30,358.71</b>
			<b>Say</b>	<b>Rs.</b>	<b>30,359.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ )

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड

(कोल इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER

CHANCH-VICTORIA AREA-XII

P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)

Phone : 06540-272126 ; FAX : 0341-2520063

- 1 .Name of Work: “Repairing roof of block no. ‘D’ (old type) at babudanga at chanch colony.”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 10)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ BCCL SOR “85”	Removal of old tarfelting.	491.67	Sqm	1.86	914.51
2/ 22.14.1	Grading roof for water proofing treatment with cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20 mm nominal size).	11.39	cum	3,314.95	37,757.58
3/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	180.09	Sqm	67.65	12,183.09
4/ 12.15.1	Painting top of roofs with bitumen of approved quality at 17kg per 10sqm impregnated with a coat of coarse sand at 60 cum per 10sqm including cleaning the slab surface with brushes and finally with a piece of cloth lightly soaked in kerosene oil complete: with residual type petroleum bitumen of penetration 80/100	491.67	Sqm	63.00	30,975.21
	<b>TOTAL</b>			<b>Rs.</b>	<b>81,830.09</b>
			<b>Say</b>	<b>Rs.</b>	<b>81,830.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ )

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer





# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड  
(कोल इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX : 0341-2520063

1. Name of Work: “Repairing drain back site of CT type qtr. Attached Guest house. C.V. Area.”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 11)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 6.12.2	Half brick masonry with F.P.S.CD 50 brick of class designation in foundations and plinth in . cement mortar 1:4 (1 cement: 4 coarse sand).	5.94	Sqm	257.25	1,528.06
2/ 6.1.2 (A.R.)	Brick work in F.P.S bricks of class designation 50 in foundation and plinth in: Cement mortar 1:6 (1 cement: 6 coarse sand).	4.91	Cum	2,007.00	9,854.37
3/ 2.6.1	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth. 1.5m in width as well as 10sqm on plan) including disposal of excavated earth, lead up to 50m and lift up to 1.5m, disposed earth to be leveled and neatly dressed. All kinds of soil.	5.77	Cum	101.85	587.67
4/ 13.7.2	12 mm cement plaster finished with a floating coat of neat cement of mix: 1:4 (1 Cement: 4 fine sand).	142.08	Sqm	97.90	13,909.63
5/ 11.3.1	Cement concrete flooring 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry, but excluding the cost of nosing of steps etc. complete. 40 mm thick with 20 mm nominal size stone aggregate.	5.16	Sqm	192.95	995.62
6/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	33.15	Sqm	67.65	2,242.59
7/ 6.4.2 (A.R.)	Brick work in F.P.S. bricks of class designation 50 in superstructure above plinth level up to floor V level in all shapes and sizes in : cement mortar 1:6 (1 cement : 6 coarse sand).	0.197	Cum	2,137.95	421.17
8/ 4.1.8	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering – All work up to plinth level:1:4:8 (1 cement: 4 coarse sand: 8 graded stone aggregate 40 mm nominal size)	0.75	Cum	2,449.00	1,836.75
	<b>TOTAL</b>			<b>Rs.</b>	<b>31,375.86</b>
			<b>Say</b>	<b>Rs.</b>	<b>31,376.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Re-const. of boundary wall at Durga mandir of V. West Colliery (160’ lenth).”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

### **BILL OF QUANTITY (Sl. No. 12)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 2.8.1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kind of soil.	26.37	Cum	103.40	2,726.65
2/ 4.1.9	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering – All work up to plinth level: 1:4:8 (1 cement: 4 fine sand: 8 graded stone aggregate 40 mm nominal size).	3.73	Cum	2,296.15	8,564.63
3/ 6.1.2 (A.R.)	Brick work in F.P.S bricks of class designation 50 in foundation and plinth in: Cement mortar 1:6 (1 cement: 6 coarse sand).	14.81	Cum	2,007.00	29,723.67
4/ 6.12.2	Half brick masonry with F.P.S.CD 50 brick of class designation in foundations and plinth in . cement mortar 1:4 (1 cement: 4 coarse sand).	52.95	Sqm	257.25	13,621.38
5/ 6.4.2 (A.R.)	Brick work in F.P.S. bricks of class designation 50 in superstructure above plinth level up to floor V level in all shapes and sizes in : cement mortar 1:6 (1 cement : 6 coarse sand).	0.81	Cum	2,137.95	1,731.73
6/ 6.13.2	Half brick masonry with F.P.S bricks of class designation 50 in superstructure above plinth level up to floor V level Cement mortar 1:4 ( 1 cement: 4 coarse sand )	26.47	Sqm	273.45	7,238.22
7/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	173.88	Sqm	67.65	11,762.98
8/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	173.88	Sqm	9.30	1,617.08
9/ 9.48.1	Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. all complete: Fixed to steel windows by welding.	90.00	Kg	59.25	5,332.50

Contd...P/3

-P/2-

10/ 13.61.1	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade: Two or more coats on new work.	5.57	Sqm	35.35	196.89
	<b>TOTAL</b>			<b>rs.</b>	<b>82,515.73</b>
			Say	<b>Rs.</b>	<b>82'516.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer

-3-



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड  
(कोयला इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

Name of Work: “Repairing & maint. Of Durga Mandir/ Kali Mandir at V. West colliery.”

2. Name of Tenderer :

3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 13)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 14.42.1	White washing with lime to give an even shade: Old work (two or more coats).	353.57	Sqm	4.10	1,449.64
2/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	166.33	Sqm	22.85	3,800.64
3/ M.R.	Cleaning of Polishing Kalash.	1.00	Each L.S.	1000.00	1000.00
4/ 2.31	Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth up to 30 cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared.	457.97	100 sqm	263.90	1,208.58
5/ 12.15.1	Painting top of roofs with bitumen of approved quality at 17kg per 10sqm impregnated with a coat of coarse sand at 60 cudm per 10sqm including cleaning the slab surface with brushes and finally with a piece of cloth lightly soaked in kerosene oil complete: with residual type petroleum bitumen of penetration 80/100	58.06	Sqm	63.00	3,657.78
6/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	10.00	Sqm	67.65	676.50
	<b>TOTAL</b>			<b>Rs.</b>	<b>11,793.14</b>
			<b>Say</b>	<b>Rs.</b>	<b>11,793.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated  
cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# **BHARAT COKING COAL LIMITED**

A Subsidiary of Coal India Limited

**भारत कोकिंग कोल लिमिटेड**  
(कोल इण्डिया लिमिटेड का एक अंग)



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Cleaning of main drain near Football ground at R.S. Colony, Begunia.”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## **BILL OF QUANTITY (Sl. No. 14)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 2.6.1- 2.36	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth. 1.5m in width as well as 10sqm on plan) including disposal of excavated earth, lead up to 50m and lift up to 1.5m, disposed earth to be leveled and neatly dressed. All kinds of soil.	81.71	Cum	88.00	7,190.48
2/ 1.1.2	Carrriage of earth lead up to 1.00 K.M.	81.71	Cum	49.42	4,038.10
3/ 2.31	Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth up to 30 cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared.	706.04	100 sqm	263.90	1,863.23
	<b>TOTAL</b>			<b>Rs.</b>	<b>13,091.81</b>
			<b>Say</b>	<b>Rs.</b>	<b>13,092.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ )

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# **BHARAT COKING COAL LIMITED**

A Subsidiary of Coal India Limited

**भारत कोकिंग कोल लिमिटेड**  
(कोयला इण्डिया लिमिटेड का एक अंग)



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Cleaning of sump and channel for raw water supply to Begunia WTP and maint. Sump & Channel up to 4 Months..”

2. Name of Tenderer :

3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## **BILL OF QUANTITY (Sl. No. 15)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 2.6.1-2.36	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth. 1.5m in width as well as 10sqm on plan) including disposal of excavated earth, lead up to 50m and lift up to 1.5m, disposed earth to be leveled and neatly dressed. All kinds of soil.	851.76	Cum	(101.85-13.85)= 88.00	74,954.88
2/ Approved Rate.	Supplying and placing of gunny bags site sand filling & const of bag.	980.00	Cum	7.00	6,860.00
	<b>TOTAL</b>			<b>Rs.</b>	<b>81,814.88</b>
			<b>Say</b>	<b>Rs.</b>	<b>81,815.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# **BHARAT COKING COAL LIMITED**

A Subsidiary of Coal India Limited

**भारत कोकिंग कोल लिमिटेड**  
(कोयला इण्डिया लिमिटेड का एक अंग)



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Repairing & maint. Of 5 units NHS Qtr. No. O/3, M/4, N/4, M/8 & Q/4 at D.R. Colony..”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## **BILL OF QUANTITY (Sl. No. 16)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 11.3 (A.R.)	Cement concrete flooring 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat sement including cement slurry, but excluding the cost of nosing of steps etc. complete. 25 mm thick with 12.5 mm nominal size stone aggregate.	168.00	Sqm	143.75	24,150.00
2/ 15.2.1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 meters lead as per direction of Engineer-in-charge. 1:3:6 or richer mix.	3.25	Cum	368.45	1,197.46
3/ 9.5.2	Providing and fixing paneled or paneled and glazed shutters for doors, windows and clerestory windows including ISI marked black enameled M.S. butt hinges with necessary screws excluding, paneling which will be paid for separately. 30 mm thick shutters.	6.40	Sqm	810.90	5,189.76
4/ 10.2	Structural steel work riveted, bolted or welded in built up section, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete..	295.00	Kg	46.35	13,673.25
5/ 14.2.1	Fixing chowkhats in existing opening including embedding chowkhats in floors or walls cutting masonry for holdfasts embedding hold fasts in cement concrete blocks with cement concrete 1:3:6 (1 Cement: 3 coarse sand: 6 graded stone aggregate 20 mm nominal size). Painting two coats of approved wood preservative to sides of chowkhats and making good the damages to walls and floors as required complete including disposal of rubbish to the dumping ground within 50 meters lead: Door chowkhats.	6.00	Each	354.45	2,126.70
6/ 15.12.1	Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 meters lead: of are 3 sq. metres and below.	5.00	Each	54.60	273.00
7/ 13.50.1	Applying priming coat: with ready mixed pink or Grey primer of approved brand and manufacture on wood work (hard and soft wood).	9.94	Sqm	16.55	164.50
8/ 6.13.2	Half brick masonry with F.P.S bricks of class designation 50 in superstructure above plinth level up to floor V level Cement mortar 1:4 ( 1 cement: 4 coarse sand )	15.04	Sqm	273.45	4,112.68

Contd.....P/2

**-P/2-**

9/ 6.4.2 (A.R.)	Brick work in F.P.S. bricks of class designation 50 in superstructure above plinth level up to floor V level in all shapes and sizes in : cement mortar 1:6 (1 cement : 6 coarse sand).	0.11	Cum	2,137.95	235.17
10/ 13.16.1	6mm cement plaster of mix: 1:3 (1 cement: 3 fine sand ).	23.11	Sqm	62.15	1,436.28
11/ 6.12.2	Half brick masonry with F.P.S.CD 50 brick of class designation in foundations and plinth in . cement mortar 1:4 (1 cement: 4 coarse sand).	3.62	Sqm	257.25	931.24
12/ 13.7.2	12 mm cement plaster finished with a floating coat of neat cement of mix: 1:4 (1 Cement: 4 fine sand).	10.00	Sqm	97.90	979.00
13/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	79.73	Sqm	67.65	5,393.73
14/ 15.56	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	40.00	Sqm	8.20	328.00
15/ 14.42.1	White washing with lime to give an even shade: Old work (two or more coats).	825.00	Sqm	4.10	3,382.50
16/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	325.00	Sqm	9.30	3,022.50
17/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	200.00	Sqm	22.85	4,570.00
	TOTAL			Rs.	71,165.77
			Say	Rs.	71,165.00

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer





# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड  
(कोयला इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Cleaning of drain 1 No. Septic tank near ‘A’ type & ‘B’ type qtr. At R.S. Colony, Begunia.”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 17)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 2.6.1-2.36	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth. 1.5m in width as well as 10sqm on plan) including disposal of excavated earth, lead up to 50m and lift up to 1.5m, disposed earth to be leveled and neatly dressed. All kinds of soil.	162.63	Cum	(101.85-13.85)= 88.00	14,311.44
2/ 1.1.2	Preparation of debris lead up to 1.00 K.M.	162.63	Cum	49.42	8,037.17
3/ 5.12	Providing, hoisting and fixing up to floor five level precast reinforced cement concrete work in string courses, bands copings, bed plates, anchor blocks, plain window sills and the like including the cost of required centering, shuttering, finishing smooth with 6 mm thick cement plaster 1:3 (1 cement: 3 fine sand ) on exposed surfaces complete but excluding cost of reinforcement with 1:2:4 (1 cement : 2 coarse sand: 4 graded stone aggregate 20 mm nominal size).	0.10	Cum	4,880.15	488.01
4/ 5.22.3	Reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete . Cold twisted bars.	9.00	K.G.	42.70	384.30
5/ A.R.	Cleaning of septic tank.	1.00	Each	1,840.00	1,840.00
	<b>TOTAL</b>			<b>Rs.</b>	<b>25,060.92</b>
			<b>Say</b>	<b>Rs.</b>	<b>25,061.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer



# **BHARAT COKING COAL LIMITED**

A Subsidiary of Coal India Limited

**भारत कोकिंग कोल लिमिटेड**  
(कोयला इण्डिया लिमिटेड का एक अंग)



OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Repairing & maint. Of school at Palasia with allied work at Basantimata Colliery.”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## **BILL OF QUANTITY (Sl. No. 18)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	293.30	Sqm	9.30	2,727.69
2/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	17.32	Sqm	22.85	395.76
3/ A.R.	Dry brick flat soiling CD-50 of all.	114.68	Sqm	111.09	12,739.80
4/ 4.1.3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering – All work up to plinth level: 1:2.4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20 mm nominal size).	5.59	Cum	3,257.45	18,209.14
5/ 6.4.2 (A.R.)	Brick work in F.P.S. bricks of class designation 50 in superstructure above plinth level up to floor V level in all shapes and sizes in : cement mortar 1:6 (1 cement : 6 coarse sand).	1.88	Cum	2,137.95	4,019.34
6/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	14.86	Sqm	67.65	1,005.28
	<b>TOTAL</b>			<b>Rs.</b>	<b>39,097.01</b>
			<b>Say</b>	<b>Rs.</b>	<b>39,097.01</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-


I / we quote \_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_

\_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer

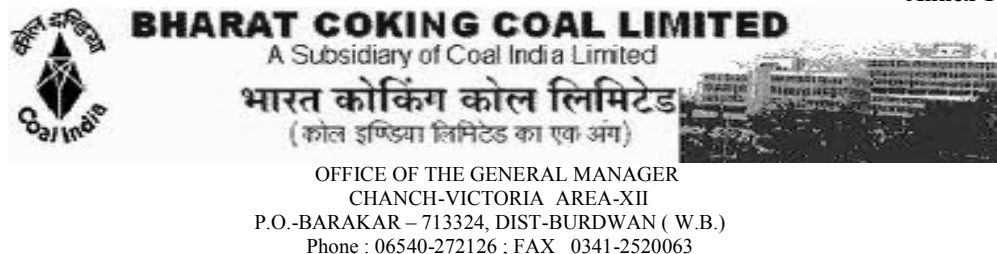

1. Name of Work: “Outer repairing of 1 block ‘C’ type qtr No. 9,10,11 & 12 at R.S. Colony..”
2. Name of Tenderer :
3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

#### **BILL OF QUANTITY (Sl. No. 19)**

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 13.1.2	12 mm cement plaster of mix: 1:6 (1 Cement: 6 fine sand).	206.24	Sqm	67.65	13,952.13
2/ 13.11	18 mm cement plaster in two coats under layer 12 mm thick cement plaster 1:5 (1 cement: 5 coarse sand) finished with a top layer 6 mm thick cement plaster 1:6 (1 cement: 6 fine sand).	4.50	Sqm	111.15	503.50
3/ 12.40.2	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS: 13592 Type A including jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion. (i) single socketed pipes. 110 mm diameter.	24.00	Metre	163.40	3,921.60
4/ 12.42.5.2	Providing and fixing on wall face unplasticised – PVC moulded fittings / accessories for unplasticised Rigid PVC rain water pipes conforming to IS: 13592 Type A including jointing with seal ring conforming to IS: 5382 leaving 10 mm gap for thermal expansion. 110mm bend.	10.00	Each	134.50	1,345.00
5/ 10.2	Structural steel work riveted, bolted or welded in built up section, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete..	125.12	Kg	46.35	5,799.31
6/ A.R.	Providing & fixing P.V.C. shutter of all.	7.52	Sqm.	514.89	3,871.97
7/ 13.39.1	Colour washing such as green, blue of buff to give an even shade: New work (two or more coats ) with a base coat of white washing with lime.	245.03	Sqm	9.30	2,278.77
8/ 15.56	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	120.00	Sqm	8.20	984.00

Contd.....P/2

-P/2-

9/ 14.54.1	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade: one or more coats on old work.	8.46	Sqm	22.85	193.31
10/ 12.43.2	Providing and fixing unplasticised – PVC pipe clips of approved design to unplasticised- PVC rain water pipes by means of 50x50x50mm hard wood plugs, screwed with M.S. screws of required length including cutting brick work and fixing in cement mortar 1:4 (1 cement: 4 coarse sand) and making good the wall etc. complete; 110mm	20.00	Each	96.60	1,938.00
	<b>TOTAL</b>			<b>Rs.</b>	<b>34,787.59</b>
			Say	<b>Rs.</b>	<b>34,788.00</b>

Having gone through the Tender documents & elements of work in the bill of quantity :-

I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.

Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ ) including the above percentage.

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer

-3-



# BHARAT COKING COAL LIMITED

A Subsidiary of Coal India Limited

भारत कोकिंग कोल लिमिटेड  
(कोयला इण्डिया लिमिटेड का एक अंग)

OFFICE OF THE GENERAL MANAGER  
CHANCH-VICTORIA AREA-XII  
P.O.-BARAKAR – 713324, DIST-BURDWAN ( W.B.)  
Phone : 06540-272126 ; FAX 0341-2520063

1. Name of Work: “Repairing of collapsible gate, tile flooring in AGM’s chamber & miscellaneous at Begunia Area Office.”

2. Name of Tenderer :

3. Address:

4. NIT No. : BCCL/XII/ACE/QTN/2011-12/37/1465

Date: 15.09.2011

5. Details of E.M.D. No:

Rs.:

Date:

## BILL OF QUANTITY (Sl. No. 20)

Sl.No.	Description of Item	Qty	Unit	Rate	Amount
1/ 15.2.1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 meters lead as per direction of Engineer-in-charge. 1:3:6 or richer mix.	1.56	Cum	368.45	574.78
2/ 15.1	Demolishing lime concrete manually / by mechanical means and disposal of material within 50 metres lead as per direction of Engineer-in-charge.	1.44	Cum	128.45	184.96
3/ 4.1.3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering – All work up to plinth level: 1:2.4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20 mm nominal size).	1.83	Cum	3,257.45	5,961.13
4/ 11.37	providing and laying Ceramic glazed floor tiles 300x300 mm (thickness to be specified by the manufacture ) of 1 <sup>st</sup> quality conforming to IS: 15622 of approved make in colours such as White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick Cement Mortar 1:4 (1 cement: 4 coarse sand) including pointing the joints with white cement and matching pigment etc., complete.	27.06	Sqm	598.65	16,199.46
5/ 11.36	Providing and laying ceramic glazed floor tiles 300x300 mm (thickness to be specified by the manufacture) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-charge in skirting, risers of steps and dados over 12 mm thick bed of cement Mortar 1:3 (1 cement: 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm including pointing in white cement mixed with pigment of matching shade complete.	3.06	Sqm	556.60	1,703.19
6/ 12.40.1	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS: 13592 Type A including jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion. (i) single socketed pipes. 75 mm diameter.	0.91	Metre	95.00	86.45
7/ 10.3	Providing and fixing in position collapsible steel shutters with vertical channels 20x10x2 mm and braced with flat iron diagonals 20x5mm size with top and bottom rail of T-iron 40x40x6mm with 40 mm dia, steel pulleys complete with bolts, nuts, locking arrangement, stoppers, handles, including applying a priming coat of approved steel primer.	2.00	Sqm.	2,592.70	5,185.40

Contd.....P/2

**-P/2-**

8/ 9.1.2	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position. Sal wood	0.0111	Cum	30,511.90	335.63
9/ 9.77	Providing and fixing bright finished brass 100 mm mortice latch with one dead bolt and a pair of lever handles with necessary screws etc. complete (best make of approved quality).	3.00	Each	307.10	921.30
10/ 9.57.1 (Sor 02)	Providing fitting ply wood in shutter of all.	3.71	Sqm	478.40	1,774.86
11/ 15.13.1	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead: of area 3 sq. metres and below.	1.00	Each	21.40	21.40
<b>TOTAL</b>				<b>Rs.</b>	<b>32,948.56</b>
			<b>Say</b>	<b>Rs.</b>	<b>32,949.00</b>

**Having gone through the Tender documents & elements of work in the bill of quantity :-**

**I / we quote \_\_\_\_\_% ( \_\_\_\_\_ ) above / below the estimated cost.**

**Our quoted offer amounts to Rs. \_\_\_\_\_ ( Rupees \_\_\_\_\_ ) including the above percentage.**

SIGNATURE OF ISSUING OFFICER

Signature & seal of Tenderer

-3-

**Annex-II****FOR PAYMENT TO CONTRACTORS**  
**Triplicate***(Note: To be submitted in*PROFORMA FOR COLLECTING PAYMENT THROUGH ELECTRONIC MODE INCLUDING  
ELECTRONIC FUND TRANSFER (EFT) & ELECTRONIC CLEARING SYSTEM (ECS)

1	Vendor/ supplier/ contractor/ customer's name & address (with telephone number & Fax number)	
2	Particulars of Bank Account	
	a) Bank Name	
	b) Branch Name (Including RTGS Code)	
	Address	
	Telephone No. & Fax No.	
	c) 9 – Digit Code Number of the Bank & Branch (Appearing on the MICR Cheque issued on the bank) or 5 digit code number of SBI	
	d) Account Type (S.B. Account/ Current Account or Cash Credit with code 10/11/13)	
	e) Ledger No./ Ledger Folio No.	
	f) Account Number (Core Banking) & Style of Account (As appearing on the cheque Book)	

**3. DATE OF EFFECT:**

I hereby declare that the particulars given above are correct & complete. If the transaction is delayed or not effected at all for reasons of incomplete or incorrect information, I would not hold the user institution responsible. I have read the option invitation letter and agree to discharge responsibility expected of me as a participant under the scheme. Any bank charges levied by the bank of such e-transfer shall be borne by us.

Date:- \_\_\_\_\_ )

contractor

(  
Signature of customer/ vendor/ supplier/

Certified that the particulars furnished above are correct as per our records.

\_\_\_\_\_ )

the Bank

(  
Signature of the authorized officials from

## DECLARATION

I, \_\_\_\_\_, Partner/Legal Attorney/ Accredited Representative of M/S \_\_\_\_\_

\_\_\_\_\_, solemnly declare that :

1. We are submitting Tender for the Work \_\_\_\_\_

\_\_\_\_\_ against Tender

Notice No. \_\_\_\_\_

dt \_\_\_\_\_

2. None of the Partners of our firm is relative of employee of Bharat Coking Coal Ltd.
3. All information furnished by us in respect of fulfillment of eligibility criteria and qualification information of this Tender is complete, correct and true.
4. None of the partners of the Firm has either individually or collectively been involved in criminal offences.
5. I hereby declare that /our firm has not been banned or delisted by any Govt. or Quasi Govt. agencies or PSUs.
6. All documents/ credentials submitted alongwith this Tender are genuine, authentic, true and valid.
7. If any information and document submitted is found to be false/ incorrect any time, department may cancel my Tender and action as deemed fit may be taken against us, including termination of the contract, forfeiture of all dues including Earnest Money and banning / delisting of our firm and all partners of the firm etc.

Signature of the Tenderer

Dated \_\_\_\_\_